

1c571 U.S. PTO
10/06/99

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 31223-74058

First Inventor or Application Identifier William R. Wheat

Title HEAT-SEAL STRENGTH IN POLYOLEFIN FILMS

Express Mail Label No. EL 364 661 177 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 26]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 2]
[Total Pages 2]
4. Oath or Declaration [Total Pages 2]
 - a. ☐ Newly executed (original or copy)
 - b. ☒ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
11. ☒ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) filed in prior application
(PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☒ Other: Check \$760.00

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08/953,523
Prior application information: Examiner Mark Eashoo Group / Art Unit: 1732

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label: 20873 or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name					
Address					
City	State	Zip Code			
Country	Telephone	Fax			

Name (Print/Type) William D. Jackson

Registration No. (Attorney/Agent)

20,846

Signature

Date

Oct 6, 99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: William R. Wheat and Aiko Hanyu
Application No.: 08/953,523
Group No.: 1732
Filing Date: October 17, 1997
Examiner: M Eashoo
For: Heat-Seal Strength in Polyolefin Films

Assistant Commissioner for Patents
Washington D.C. 20231

NOTIFICATION OF FILING OF DIVISIONAL APPLICATION

Notification is hereby being made of the filing of a divisional application for this case.


SIGNATURE OF PRACTITIONER

Reg. No. 20,846
Tel. No.: (214) 740-8000
Customer No.: 20873

William D. Jackson
Locke Liddell & Sapp LLP
2200 Ross Ave, Suite 2200
Dallas, TX 75201

CERTIFICATION UNDER 37 C.F.R. 1.8(a) and 1.10*
(When using Express Mail, the Express Mail label number is *mandatory*;
Express Mail certification is optional.)

I hereby certify that, on the date shown below, this correspondence is being:

MAILING

- ☒ deposited with the United States Postal Service in an envelope addressed to Box PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231.

31223:62786:DALLAS:616856.1

37 C.F.R. 1.8(a)

37 C.F.R. 1.10*

- ☐ with sufficient postage as first class mail. ☒ as "Express Mail Post Office to Address"
Mailing Label No. EL 412 868 545 US

TRANSMISSION

- ☐ transmitted by facsimile to the Patent and Trademark Office.

Date:

October 6, 1999

Signature


Clare Jackson

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: William R. Wheat and Aiko Hanyu

For: Heat-Seal Strength in Polyolefin Films

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EL 364 661 177 US

Date of Deposit: October 6, 1999

I hereby state that the following *attached* papers and fee

- Utility Patent Application Transmittal;
- Notification of Filing of Divisional Application
(Application Serial No. 08/953,523)
- Fee Transmittal;
- Check in the amount of \$760.00 for application fee;
- Preliminary Amendment;
- Divisional Application with two (2) drawing sheets;
- Copy of Declaration filed in parent Application Serial No. 08/953,523; and
- Postcard acknowledgement

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10, on the date indicated above and is addressed to the Box PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231.

Clare Jackson


Signature of person mailing papers and fees

(Express Mail Certificate—page 1 of 1)

669007-18887460

31223-74058

(COS 753DIV / FINT B8650D1)

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No.: 31223-74058

Prior Application:

Applicants: Wheat et al
Serial No.: 08/953,523
Filed: October 17, 1997
Group Art Unit: 1774
Examiner: Mark Eashoo, Ph.D.

Invention Title: HEAT-SEAL STRENGTH IN POLYOLEFIN FILMS

Box PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

In the Specification

Page 1, line 1, insert ---This application is a division of pending prior Application Serial
No. 08/953,523, filed October 17, 1997---; and

In the Claims

Cancel claims 13-24 of the original application.

Please add the following claims:

27. The combination of claim 9 wherein said surface layer and said third layer each have an average thickness which is less than the average thickness of said core layer.

28. The method of claim 9 wherein the ethylene-propylene copolymer of said core layer contains ethylene in an amount within the range of about 0.05-0.8 wt.%.

29. The combination of claim 9 wherein said multilayer film is at least uni-axially oriented.

30. The combination of claim 9 wherein said multi-layer film is biaxially oriented.

The Commissioner is hereby authorized to charge our Deposit Account 12-1781 for any additional fees connected with this communication which may be due or to credit any overpayment.

Respectfully submitted,

LOCKE LIDDELL & SAPP LLP



William D. Jackson
Registration No. 20,846

Date: October 6, 1999

2200 Ross Avenue, Suite 2200
Dallas, TX 75201-6776
Telephone: 214/740-8000
Direct Dial: 214/740-8535
Fax: 214/740-8800

IMPROVED HEAT-SEAL STRENGTH IN POLYOLEFIN FILMS

FIELD OF THE INVENTION


This invention relates to polyolefin films, and more particularly to the improvement of heat-seal strength through improvement of inter-layer bonding properties of such films.

31223-62786

BACKGROUND OF THE INVENTION

The polymers normally employed in the preparation of biaxially-oriented polypropylene films are isotactic polymers such as isotactic polypropylene, although on some occasions the use of syndiotactic polymers has been proposed. Isotactic polypropylene is one of a number of crystalline polymers which can be characterized in terms of the stereoregularity of the polymer chain. Various stereo-specific structural relationships denominated primarily in terms of syndiotacticity and isotacticity may be involved in the formation of stereoregular polymers for various monomers.

Isotactic polypropylene is conventionally used in the production of relatively thin films in which the polypropylene is heated and then extruded through dies and subjected to biaxial orientation by stressing the film in both a longitudinal direction (referred to as the machine direction) and in a transverse or lateral direction sometimes referred to as the "tenter" direction. The structure of isotactic polypropylene is characterized in terms of the methyl group attached to the tertiary carbon atoms of the successive propylene monomer units lying on the same side of the main chain of the polymer. That is, the methyl groups are characterized as being all above or below the polymer chain. Isotactic polypropylene can be illustrated by the following chemical formula:

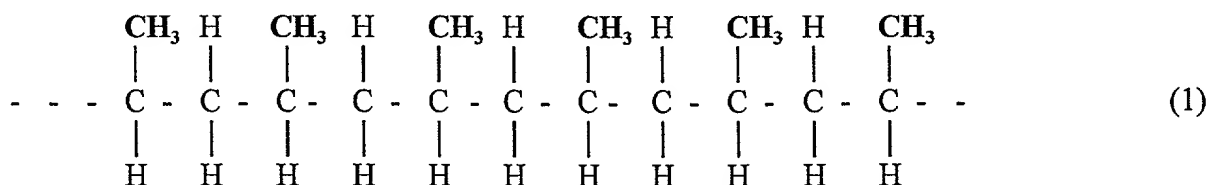

[Bolding for emphasis only]

Another way of describing the structure is through the use of NMR. Bovey's NMR nomenclature for an isotactic pentad is ...mmmm... with each "m" representing a "meso" dyad, or successive methyl groups on the same side of the plane of the polymer chain. As is known in the art, any deviation or inversion in the structure of the chain lowers the degree of isotacticity and crystallinity of the polymer.

The isotactic polymers normally employed in the preparation of biaxially-oriented polypropylene films are usually those prepared through the use of conventional Ziegler-Natta catalysts of the type disclosed, for example, in U.S. Patent Nos. 4,298,718 and 4,544,717, both to Myer et al. Thus, U.S. Patent No. 5,573,723 to Peiffer et al discloses a process for producing biaxially-oriented polypropylene film based on an isotactic polypropylene homopolymer or propylene-ethylene copolymers. Other copolymers of propylene and alpha-olefins having from 4-8 carbon atoms also may be employed in the Peiffer process.

Catalysts employed in the polymerization of alpha-olefins may be characterized as supported catalysts or unsupported catalysts, sometimes referred to as homogeneous catalysts. Traditional supported catalysts are the so-called "conventional" Ziegler-Natta catalysts, such as titanium tetrachloride supported on an active magnesium dichloride as disclosed, for example, in the aforementioned patents to Myer et al. A supported catalyst component, as disclosed in the Myer '718 patent, includes titanium tetrachloride supported on an "active" anhydrous magnesium dihalide, such as magnesium dichloride or magnesium dibromide. The supported catalyst component in Myer '718 is employed in conjunction with a co-catalyst such as an alkylaluminum compound, for example, triethylaluminum (TEAL). The Myer '717 patent discloses a similar compound which may also incorporate an electron donor compound which may take the form of

various amines, phosphenes, esters, aldehydes, and alcohols. Metallocene catalysts are often employed as unsupported or homogeneous catalysts, although, as described below, they also may be employed in supported catalyst components.

Alternative types of catalysts that produce isotactic polyolefins are disclosed in U.S. Patent
5 Nos. 4,794,096 and 4,975,403. These patents disclose chiral, stereorigid metallocene catalysts that polymerize olefins to form isotactic polymers and are especially useful in the polymerization of highly isotactic polypropylene.

SUMMARY OF THE INVENTION

The present invention relates to multi-layer polyolefin film. The film includes a core layer formed of an ethylene-propylene copolymer where the ethylene is present in an amount of no more than about 1 weight percent, preferably between about 0.1 weight percent and about 0.7 weight percent, and most preferably between about 0.3 weight percent and about 0.5 weight percent. The film has a surface layer contiguous to and bonded with the core layer, where the core layer has a thickness greater than the thickness of the surface layer. The surface layer is a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic polymer upon heating to an elevated temperature and compression. The ethylene-propylene copolymer forming the core layer has an isotactic structure and contains ethylene in an amount which is effective to provide an inter-layer bond strength with the surface layer which is at least about 15 percent greater than the inter-layer bond strength between the surface layer and a film formed of isotactic polypropylene homopolymer. The present invention further relates to a method for producing such a multi-layer film.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram of reflecting an exemplary tenter-frame process for producing biaxially-oriented polypropylene films.

Figure 2 is a diagram of a tenter-frame process including equipment for co-extrusion and/or extrusion coating of exterior layers around a core layer.

5

6630247

DETAILED DESCRIPTION OF THE INVENTION

5 The present invention involves the use of a mini-random ethylene copolymer in amounts of no more than about 1 percent in combination with propylene in the making of various films with enhanced inter-layer bond strengths. While applicable in most propylene films where the basic physical and optical characteristics of a propylene homopolymer layer are needed, but an enhanced bonding strength is desired, the present description focuses on use in biaxially-oriented polypropylene films. Those with skill in the art will recognize the transferability of the same enhanced bonding strength provided by the teachings of the invention regardless of whether a film is oriented in one, two, or no directions.

10 Biaxially-oriented films are characterized in terms of certain well-defined characteristics relating to their stereoregular structures and physical properties, including melt temperatures and shrinkage characteristics, as well as in relatively low coefficients of friction and relatively high tensile moduli and good barrier properties including relatively low permeation rates to oxygen and water. The biaxially-oriented films of the present invention are formed using a particularly configured polyolefin polymer as described in greater detail below and by using any suitable oriented film production technique, such as the conventionally-used tenter frame process.

15 The present invention addresses the use of a propylene-ethylene mini-random copolymer with an amount of ethylene no more than about 1 percent. The preferred method involves polymerization of the ethylene and propylene in the presence of an isospecific catalyst as known in the art. The resulting polymer incorporates the ethylene within the isotactic structure and pattern of the propylene. Alternative uses could incorporate the ethylene in an isotactic/syndiotactic polypropylene blend such as that disclosed in U.S. Patent Application No.

_____, (entitled Improved Metal Bond Strength in Polypropylene Films, with the same inventive entity as the present application, filed contemporaneously with the present application, the entire disclosure of which is incorporated herein by reference), while maintaining many of the advantages of the proposed invention.

5 The polymerized mixture will often further include minor amounts (typically less than 1 weight percent, and more typically less than 0.5 weight percent) of additives designed to enhance other physical or optical properties. Such mixtures may have, for example, one or more anti-oxidants present in an amount totaling no more than about 0.25 weight percent (in the tested examples below no more than about 0.15 weight percent) and one or more acid neutralizers present in an amount totaling no more than about 0.25 weight percent (in the tested examples below no more than about 0.05 weight percent). Although not present in the tested examples, additives acting as "anti-block" agents may also be present, again in relatively low percentages such as no more than about 1 weight percent, more preferably no more than about 0.5 weight percent, and even no more than about 0.25 weight percent.

10
15
20 In general, biaxially-oriented film production can be of any suitable technique, such as disclosed in Canadian Patent Application No. 2,178,104 to Peiffer et al. As described in the Peiffer et al application, the entire disclosure of which is incorporated herein by reference, the polymer or polymers used to make the film are melted and then passed through an extruder to a slot die mechanism after which it is passed over a first roller, characterized as a chill roller, which tends to solidify the film. The film is then oriented by stressing it in a longitudinal direction, characterized as the machine direction, and in a transverse direction to arrive at a film which can be characterized in terms of orientation ratios, sometimes also referred to as stretch

ratios, in both longitudinal and transverse directions. The machine direction orientation is accomplished through the use of two sequentially disposed rollers, the second or fast roller operating at a speed in relation to the slower roller corresponding to the desired orientation ratio. This may alternatively be accomplished through a series of rollers with increasing speeds, sometime with additional intermediate rollers for temperature control and other functions. After the film has been stressed in the machine direction, it is again cooled and then pre-heated and passed into a lateral stressing section, for example, a tenter frame mechanism, where it is again stressed, this time in the transverse direction. Orientation in the transverse direction is often followed by an annealing section. Subsequently, the film is then cooled and may be subjected to further treatment, such as a surface treatment (for example corona treatment or flame treatment), as described, for example, in the aforementioned Canadian Patent Application 2,178,104 or in U.S. Patent No. 4,692,380 to Reid, the entire disclosure of which is incorporated here by reference. The film may also be metallized as described in the aforementioned U.S. Patent No. 4,692,380 to Reid. While corona and flame treatment typically occurs immediately following orientation and prior to the initial roll up, metallizing is typically performed at a separate time and location.

Most sophisticated applications call for multi-layer oriented films. Many of these films use a core layer chosen for good stiffness and other physical properties (typically isotactic polypropylene homopolymer) with additional thinner exterior layers used for heat sealing, improved slip or barrier qualities, etc.. Numerous methods exist for producing multi-layer films including coextrusion, extrusion coating, extrusion laminating, or standard lamination techniques.

Of particular interest with respect to the current invention is the use of multi-layer films with a heat-sealing layer contiguous with a propylene homopolymer core layer (or similarly performing core layer). Preferred values for the average thickness of the core layer are within the approximate range of 5 microns to 150 microns (the range of about 5 microns to 150 microns), with the preferred average thickness for the surface layer being within the approximate range of 0.3 microns to 80 microns (the range of about 0.3 microns to 80 microns). Regardless, the surface layer preferably has a thickness less than the core layer, preferably substantially less than the core layer.

The heat sealing generally occurs by placing the heat-sealing layer (typically a thermoplastic polymer, for example ethylene-propylene copolymer or ethylene-butene-propylene terpolymer) in contact with a corresponding layer (i.e., another thermoplastic polymer, for example ethylene-propylene copolymer or ethylene-butene-propylene terpolymer, preferably the corresponding layer will be have the same or similar chemical make-up as the heat-sealing layer) and using a combination of heat and pressure to create a seal bonding the two corresponding layers together. Obviously, in most instances, the heat-seal layer will be a surface layer in order to be able to contact and seal with another layer (or with a different section of itself). After sealing, it is possible that the sealed structure may constitute an internal layer in an even more complex multi-layer film or composition of multi-layer films.

The heat-seal strength is the strength required to separate the heat-sealed packaging. Typically the failure mode of such packaging is delamination of the heat-seal layer from the core layer. Hence, increasing the inter-layer bonding strength between the heat-seal layer and the core layer tends to improve the heat-seal strength of the multi-layer film. Also, for similar reasons,

assuming a good heat seal has been made, the heat-seal strength will generally reflect the strength of the inter-layer bond between the core layer and the heat-seal layer.

The heat-sealing layers under discussion are most often coextruded with the core propylene homopolymer. Coextrusion involves coinjecting the polymer of the heat-seal layer and the polymer of the core layer through a slotted die system to form a film formed of an outer layer of the heat-sealing polymer and a core layer of the core polymer. Additional layers could also be coextruded, either being an additional heat-seal layer on the other surface of the core layer, or layers serving other functions, such as barriers, anti-block layers, etc.. Alternatively, a heat-seal layer could be extrusion coated later in the film making process. Finally, other layers could be added to create a more complex film after or contemporaneous with the formation of the basic heat-seal layer to core layer relationship. In any event, the advantages of the present invention remain so long as the heat-seal layer is contiguous to and bonded with the core layer.

Turning now to **Figure 1**, there is shown a schematic illustration of a suitable "Tenter Frame" orientation process which may be employed in producing biaxially-oriented polypropylene film ("BOPP film") in accordance with the present invention. More particularly and with reference to **Figure 1**, a source of molten polymer is supplied from a hopper **10** to an extruder **12** and from there to a slot die **14** which produces a flat, relatively thick film **16** at its output. Film **16** is applied over a chill roller **18**, and it is cooled to a suitable temperature within the range of about 30-60°C. The film is drawn off the chill roller **18** to a stretching section **20** to which the machine direction orientation occurs by means of idler rollers **22** and **23** which lead to preheat rollers **25** and **26**.

As the film is drawn off the chill roller 18 and passed over the idler rollers, it is cooled to a temperature of about 30-60°C. In stretching the film in the machine direction, it is heated by preheat rollers 25 and 26 to an incremental temperature increase of about 60-100°C. and then passed to the slow roller 30 of the longitudinal orienting mechanism. The slow roller may be operated at any suitable speed, usually about 20-40 feet per minute in this type of pilot production line. The fast roller 31 is operated at a suitable speed, typically about 150 feet per minute in a pilot line, to provide a surface speed at the circumference of about 4-7 times that of the slow roller in order to orient the film in the machine direction. In a commercial production line, casting speeds may be much higher such as 20 to 60 meters per minute, with 120 to 360 meters per minute in final speeds.

As the oriented film is withdrawn from the fast roller, it is passed over a roller 33 at room temperature conditions. From here it is passed over tandem idler rollers 35 and 36 to a lateral stretching section 40 where the film is oriented by stretching in the transverse direction. The section 40 includes a preheat section 42 comprising a plurality of tandem heating rollers (not shown) where it is again reheated to a temperature within the range of 130-180°C. From the preheat section 42 of the tenter frame, the film is passed to a stretching or draw section 44 where it is progressively stretched by means of tenter clips (not shown) which grasp the opposed sides of the film and progressively stretch it laterally until it reaches its maximum lateral dimension. Lateral stretching ratios are typically greater than machine direction stretch ratios and often may range anywhere from 5-12 times the original width. Ratios of 8-10 times are usually preferred. The concluding portion of the lateral stretching phase includes an annealing section 46, such as an oven housing, where the film is heated at a temperature within the range of 130-170°C. for

5 a suitable period in time, about 1-10 seconds. The annealing time helps control certain properties, and increased annealing is often specifically used to reduce shrinkage. The biaxially-oriented film is then withdrawn from the tenter frame and passed over a chill roller 48 where it is reduced to a temperature of less than about 50°C. and then applied to take-up spools on a take-up mechanism 50. From the foregoing description, it will be recognized that the initial orientation in the machine direction is carried out at a somewhat lower temperature than the orientation in the lateral dimension. For example, the film exiting the preheat rollers is stretched in the machine direction at a temperature of about 120°C. The film may be cooled to a temperature of about 50°C. and thereafter heated to a temperature of about 160°C. before it is subject to the progressive lateral dimension orientation in the tenter section.

10 **Figure 2** is a schematic diagram illustrating a tenter-frame process including the capability of co-extruding one or two surface layers with the core layer. The main extruder 100 is flanked by two supplemental extruders 102 and 104. Through the operation of one of the supplemental extruders 102 or 104 a separate polymer or polymer blend may be extruded to be in contact with the primary polymer or polymer blend emerging from main extruder 100. If both supplemental extruders 102 and 104 are used, then a sandwich may be created with the primary polymer forming the core layer, and the polymers extruded by the supplemental extruders 102 and 104 forming surface layers. These surface layers may be identical or may be of different polymers or polymer blends, as the illustrated supplemental extruders 102 and 104 may pull from hoppers or sources of polymer separate from each other as well as being separate from the source for extruder 100. After extrusion and casting, the multi-layer film continues through the machine direction orientation section 106, pre-heating section 108, transverse direction orientation section

110, annealing section 112, cooling section 114, corona treating section 116, and finally the take-up (or wind-up) section 118. In an alternative method also available in Figure 2, exterior layers may be added in the extrusion coating section 120, after machine direction orientation, but before transverse direction orientation. In extrusion coating section 120, additional material is extruded to coat either one or both surfaces of the mono-axially oriented film emerging from machine direction orientation section 106. The mono-axially oriented film to be extrusion coated may be a mono-layer film generated by primary extruder 100, or may be a multi-layer film created by co-extrusion by a combination of main extruder 100 and supplemental extruders 102 and 104.

The following examples illustrate the improved inter-layer bond strength provided by the present invention. These include unexpectedly significant advantages in inter-layer bond strength provided even with small amounts of ethylene. The improved inter-layer bond strength provides corresponding improvement in heat-seal strength of the multi-layer film.

Example 1

Resins with and without a mini-random ethylene copolymer were processed through a biaxially-oriented polypropylene film making process using a tenter frame system and the resulting properties then measured.

The trial was conducted in a sixty inch continuous pilot tenter line. The films to be tested were manufactured by coextruding the mini-random ethylene copolymer (or the control isotactic polypropylene) with a layer of ethylene-propylene copolymer denominated Z9400-type containing approximately 6.1 percent by weight ethylene. The coextruded layer acts as a heat-seal layer. The line was capable of 76.2 meter per minute output and two sided corona discharge treatment.

Biaxial orientation of flat films was carried out in two sequential steps. The casted sheet chilled on a rotating cold steel roll was first stretched longitudinally (in the machine direction or "MD") in the tangential gap between sets of rolls rotating at different speeds. Subsequently, the film was stretched transversely (in the transverse direction or "TD") in a tenter frame in which the edges of the film were gripped by a series of clips and diverged in TD. Standard MD draw ratio was 5 in one stage (5x:1x) and that in TD was consistently 9 (1x:9x). The films were surface treated by means of corona discharge treatment (corona treatment) with the level of treatment measured contemporaneously closely following the treatment. Temperature settings are listed in Table 1 below:

TABLE 1

Temp	Melt	Cast Roll	Chill Roll	MDO			TDO		
				Cond	Stretch	Anneal	Cond	Stretch	Anneal
°C	221	43	49	116	121	127	166	160	154
°F	430	110	120	240	250	260	330	320	310

This process was used to produce two multi-layer BOPP film samples. Sample CS-1 was a controlled sample containing isotactic polypropylene generated using standard Ziegler-Natta catalysis and further including the following additives: Irganox 1010 (an anti-oxidant) in an amount of 0.1 weight percent, Irgafos 168 (an anti-oxidant) in an amount of 0.05 weight percent, and calcium stearate (an acid neutralizer) in an amount of 0.05 weight percent. Sample RE-1 was configured identically with the sole exception that the polypropylene homopolymer was replaced by a propylene-ethylene copolymer containing approximately 0.6 percent by weight

ethylene. These films were tested for inter-layer bond strength which results in improved heat-seal strength.

In order to test the heat-seal strength, the films were folded back on themselves so that the heat-seal layer was in contact with itself. The layer was basically welded to itself at one of two temperatures creating a heat seal. When such a sample is pulled apart in an Instron, the normal seal failure mode is delamination of the homopolymer layer (or mini-random copolymer layer) from the heat-seal layer, as this tends to be the weakest bond. Even if failure occurs in another mode, it still defines a minimum strength for the inter-layer bond between the homopolymer layer and the heat-sealing layer.

Table 2, following, details the results of the tests providing Bond Strengths in N/m for the two samples at the two different seal temperatures:

TABLE 2

Seal Temperature/Sample	CS-1	RE-1
Seal Temp. 110°C	39 N/m	41 N/m
Seal Temp. 127°C	151 N/m	255 N/m

At a sealing temperature of 110°C a good bond/heat seal was not obtained, thus leaving the bond as the probable failure mechanism with equivalent strengths for both samples. Once a good bond/heat seal was obtained the improved strength of the inter-layer bond was reflected in the heat-seal strength. The mini-random ethylene copolymer provided an approximately 70 percent improvement in the inter-layer bond strength between the core layer and the heat-seal layer as compared with an equivalent heat-seal layer bonded with polypropylene homopolymer. Improvement of at least 50 percent is expected in most instances.

Example 2

In another experiment, a mini-random ethylene copolymer containing approximately 0.1 to 0.2 percent weight ethylene and possibly as low as 0.05 weight percent was run in the middle of a batch of propylene homopolymer being used to form biaxially-oriented polypropylene films with a heat-seal layer. The tests on the heat-seal strength of the films produced demonstrated an approximately 20 percent increase on average over the seal strength of the same films using propylene homopolymer. The individual strength improvement ranged from about 15 percent to about 25 percent or more.

In summary, the use in a core layer of an ethylene-propylene copolymer containing ethylene in an amount no more than about 1.0 weight percent, preferably between about 0.05 and about 0.8 weight percent, more preferably between about 0.1 and about 0.7 weight percent, and most preferably between about 0.3 and 0.5 weight percent, is believed to provide enhancement of inter-layer bond strength of at least about 15 percent over the strength of the bond between the heat-seal layer and a film formed of polypropylene homopolymer. For ethylene contents between about 0.5 and about 0.7 weight percent, and preferably about 0.6 weight percent these advantages are anticipated to be at least about 50 percent, and potentially to average at least about 60 percent. Even surprisingly low levels of ethylene content, between about 0.05 - 0.4 weight percent, more specifically about 0.1 - 0.2 weight percent, would give enhancements in inter-layer bond strength that may be at least about 15 percent, and potentially at least about 30 percent over the bond strength using a film formed of polypropylene homopolymer. As noted above, the most preferred ethylene content of about 0.3 - 0.5 weight percent will provide enhanced inter-layer bond strengths with heat-seal layers of at least about

30 percent, and potentially at least about 50 percent, over the bond strength of the same or similar heat-seal layers bonded with a film formed of isotactic polypropylene homopolymer.

Having described specific embodiments of the present invention, it will be understood that modifications thereof may be suggested to those skilled in the art, and it is intended to cover all such modifications as fall within the scope of the appended claims.

5

569097 48657460

CLAIMS

What is claimed:

1. In a multi-layer polyolefin film, the combination comprising:
 - a. a surface layer of said film comprising a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic polymer upon heating to an elevated temperature and compression; and
 - b. a core layer contiguous to said surface layer, said core layer having a thickness greater than said surface layer, said core layer formed of ethylene-propylene copolymer having an isotactic structure and containing ethylene in an amount of no more than about one weight percent which is effective to provide an inter-layer bond strength with said surface layer which is at least about 15 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.
2. The combination of claim 1, wherein said core layer has an average thickness within the range of about 5 microns to 150 microns and said surface layer has a thickness within the range of about 0.3 microns to 80 microns, said surface layer having a thickness less than said core layer.
3. The combination of claim 1, wherein said inter-layer bond strength between said surface layer and said core layer is at least about 50 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

4. The combination of claim 1, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.05 weight percent and about 0.8 weight percent.

5. The combination of claim 1, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.3 weight percent and about 0.5 weight percent and wherein said inter-layer bond strength between said surface layer and said core layer is at least about 30 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

6. The combination of claim 1, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.1 weight percent and about 0.2 weight percent.

7. The combination of claim 3, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.5 weight percent and about 0.7 weight percent.

8. The combination of claim 1, further comprising:

c. a third layer of said polyolefin film contiguous to said core layer and not contiguous to said surface layer, said third layer comprising a polymer.

9. The combination of claim 8, wherein said third layer comprises a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic film upon heating to an elevated temperature and compression.

10. The combination of claim 8, wherein said third layer constitutes a second surface layer capable of forming an effective heat seal with said surface layer upon heating to an elevated temperature and compression.

11. The combination of claim 1, wherein said multi-layer film is oriented in at least one direction.

12. The combination of claim 1, wherein said multi-layer film is biaxially oriented.

13. In a process for producing a multi-layer film of enhanced inter-layer bond strength, the combination comprising:

a. providing a first polymer of said film comprising a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic film upon heating to an elevated temperature and compression;

b. providing a second polymer formed of ethylene-propylene copolymer having an isotactic structure; and,

c. coinjecting said first and second polymers through a slotted die system to form a film formed of a surface layer of said first polymer and a core layer of said second polymer, wherein said second polymer contains ethylene in an amount of no more than about one weight percent which is effective to provide an inter-layer bond strength between said core layer and said surface layer which is at least about 15 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

14. The process of claim 13, wherein said inter-layer bond strength between said surface layer and said core layer is at least about 50 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

15. The process of claim 13, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.05 weight percent and about 0.8 weight percent.

16. The process of claim 13, wherein said second polymer contains ethylene in an amount between about 0.3 weight percent and about 0.5 weight percent and wherein said inter-layer bond strength between said surface layer and said core layer is at least about 30 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

17. The process of claim 13, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.1 weight percent and about 0.2 weight percent.

18. The process of claim 14, wherein said core layer formed of ethylene-propylene copolymer contains ethylene in an amount between about 0.5 weight percent and about 0.6 weight percent.

19. The process of claim 13, further comprising the step of stretching said film in at least one direction to form an oriented film after said coinjecting step.

20. The process of claim 19, wherein said step of stretching said film in at least one direction comprises stretching said film in the machine direction further comprising the additional step after stretching said film in the machine direction of stretching said film in the transverse direction while heating said film above 120°C, producing a biaxially-oriented multi-layer polyolefin film.

21. The process of claim 13, further comprising the step of providing a third polymer of said film.

22. The process of claim 21, wherein said coinjecting step further comprises coinjecting said third polymer with said first and second polymers through a slotted die system to form a film formed of a first surface layer formed of said first polymer, a core layer formed of said second polymer contiguous to said first surface layer, and a second surface layer formed of said third polymer contiguous to said core layer and not contiguous to said first surface layer.

23. The process of claim 22, wherein said third polymer is a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic film upon heating to an elevated temperature and compression.

24. The process of claim 22, wherein said second surface layer and said first surface layer are formed of the same material, wherein said second surface layer is capable of forming an effective heat seal with said first surface layer upon heating to an elevated temperature and compression.

25. In a process for producing a multi-layer film of enhanced inter-layer bond strength, the combination comprising:

a. providing a first polymer of said film comprising a thermoplastic polymer capable of forming an effective heat seal with a corresponding thermoplastic film upon heating to an elevated temperature and compression;

b. providing a second polymer formed of ethylene-propylene copolymer having an isotactic structure; and,

c. injecting said second polymer through a slotted die system to form a film;

d. stretching said film in at least one direction to form an oriented film; and


e. extrusion coating at least one side of said film with said first polymer, forming a surface layer of said first polymer and a core layer of said second polymer, wherein said second polymer contains ethylene in an amount of no more than about one weight percent which is effective to provide an inter-layer bond strength between said core layer and said surface layer which is at least about 15 percent greater than the inter-layer bond strength between said surface layer and a film formed of isotactic polypropylene homopolymer.

26. The process of claim 25, further comprising the additional step after said extrusion coating step of stretching said film in the transverse direction while heating said film above 120°C, producing a biaxially-oriented multi-layer polyolefin film.

ABSTRACT

The present invention is for the improvement of inter-layer bonding strength in polypropylene films through the addition of ethylene as a mini-random copolymer in an amount of no more than about 1 weight percent, more preferably no more than about 0.7 weight percent, and most preferably between about 0.3 weight percent to about 0.5 weight percent or even amounts less than about 0.2 weight percent. The invention allows the improvement of inter-layer bond strength in multi-layer films resulting specifically in improved heat seal strength. The invention encompasses both the resulting films with enhanced heat seal strength and the process for producing such films. In the preferred embodiment, the proposed mini-random copolymer is formed into a film layer used in place of a propylene homopolymer layer, providing improved bonding properties over a film formed of polypropylene homopolymer, while maintaining at acceptable levels the physical and optical characteristics of a film layer made from a propylene homopolymer, such as stiffness.

FIG. 1

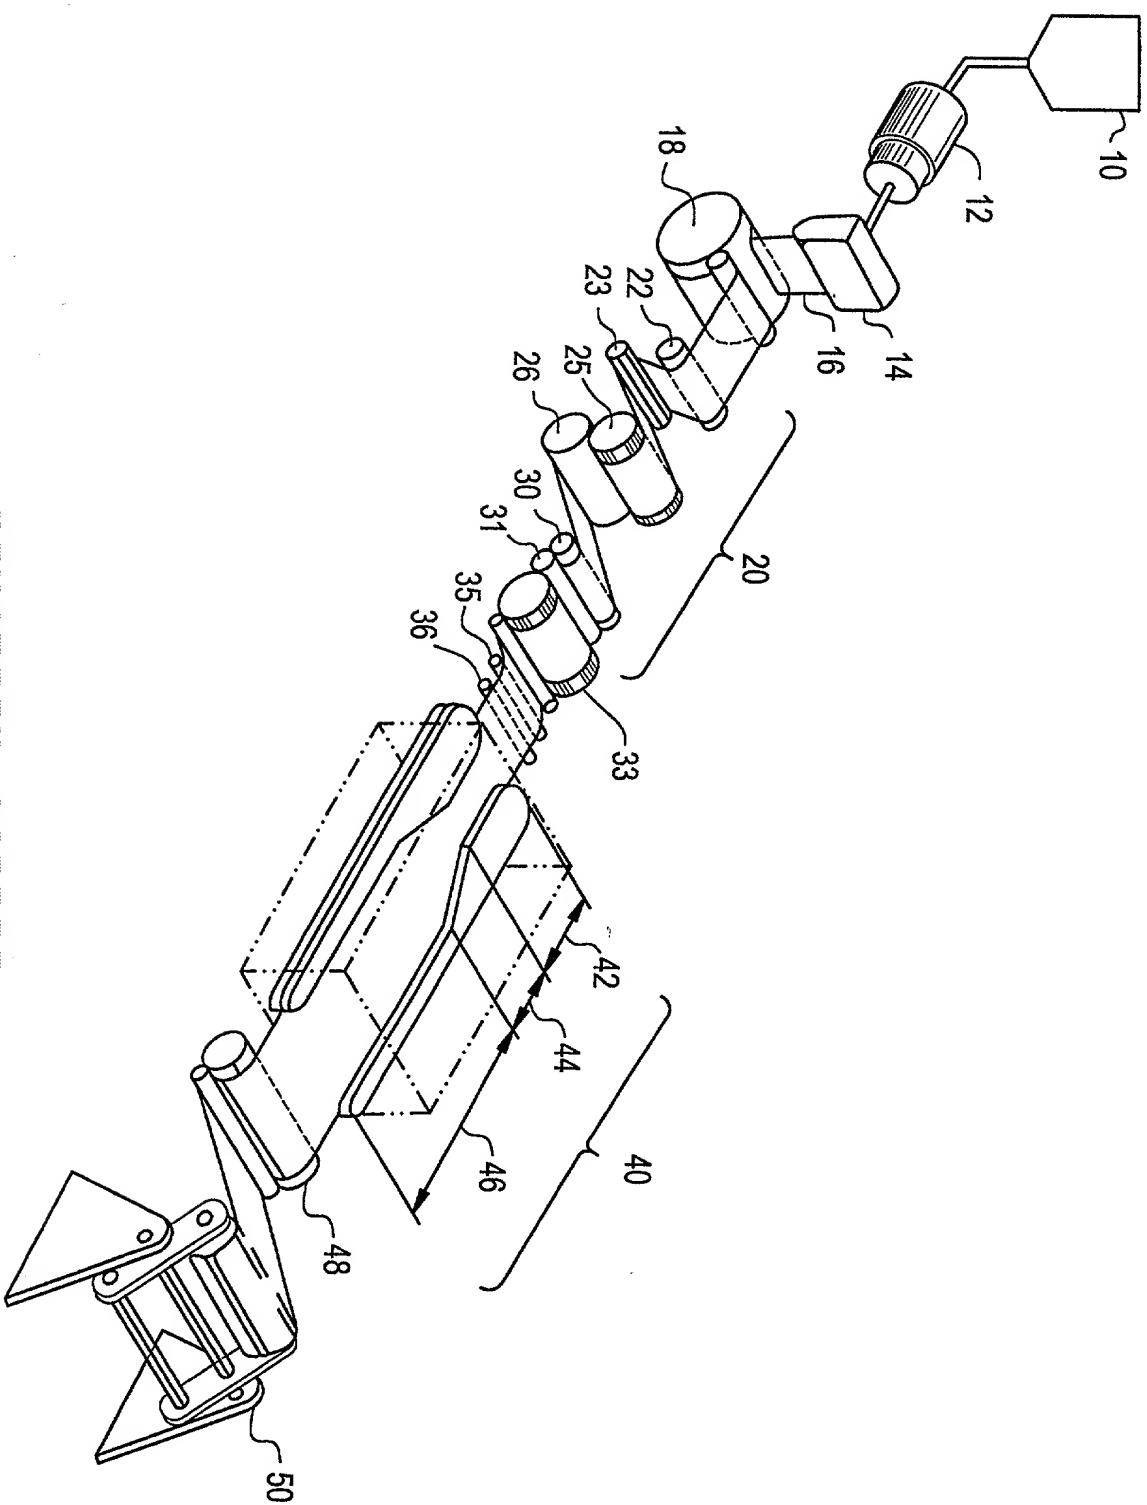

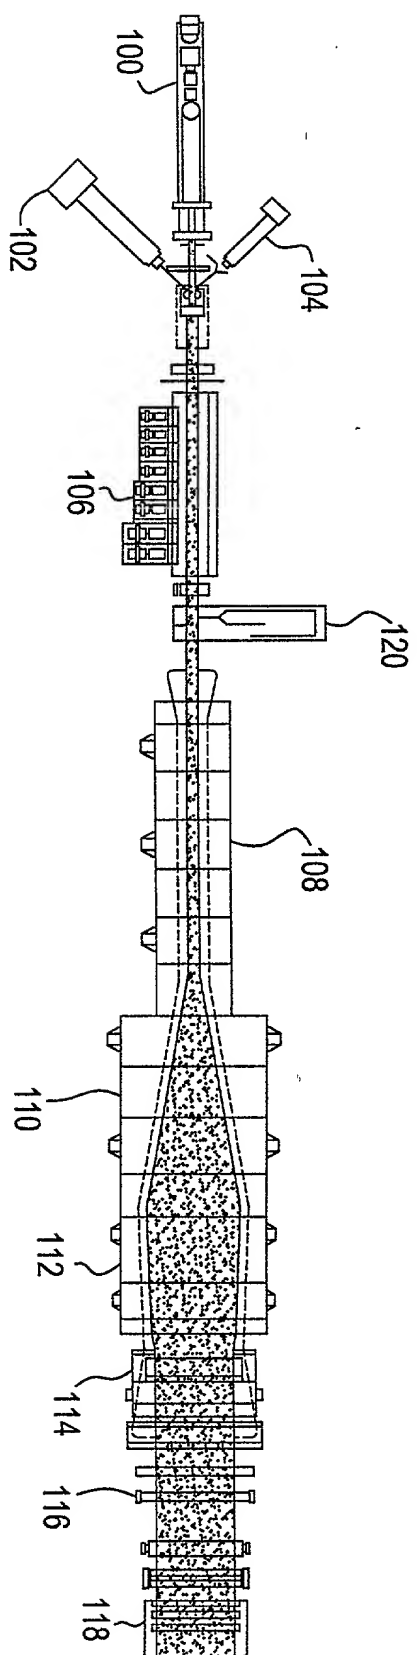


Table 1	
Parameter	Value
α	0.05
β	0.05
γ	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
σ	0.05
τ	0.05
υ	0.05
ϕ	0.05
χ	0.05
ψ	0.05
ω	0.05
δ	0.05
ϵ	0.05
ζ	0.05
η	0.05
θ	0.05
ι	0.05
κ	0.05
λ	0.05
μ	0.05
ν	0.05
ξ	0.05
\omicron	0.05
π	0.05
ρ	0.05
$\sigma</$	

DECLARATION

As below-named inventors, we hereby declare that:

Our residence, post office address, and citizenship are as stated below next to our names, that we believe we are the original, first, and joint inventors of the subject matter which is described and claimed and for which a patent is sought on the invention, design, or discovery entitled **IMPROVED HEAT SEAL STRENGTH IN POLYOLEFIN FILMS**, the specification of which was filed with the Patent and Trademark Office on October 17, 1997, under Express Mail Certificate No. EM 324272868US, and assigned Application Serial No. 08/953,523.

We have reviewed and understand the contents of the above-identified patent application, including the claims, as amended by any amendments referred to above; that we do not know and do not believe that said invention, design or discovery was ever known or used in the United States of America before our invention or discovery thereof, or patented or described in any printed publication in any country before our invention or discovery thereof for more than one year prior to this application, or in public use or on sale in the United States of America more than one year prior to this application; that said invention, design or discovery has not been patented or made the subject of an inventor's certificate issued prior to the date of this application in any country foreign to the United States of America on an application filed by us or our legal representatives or assigns; and that we acknowledge our duty to disclose information of which we are aware which is material to patentability in accordance with 37 C.F.R. Section 1.56(a).

Please direct correspondence and phone calls to:

Jimmy D. Wheelington, Esq.
Fina Technology, Inc.
P. O. Box 410
Dallas, Texas 75221
(214) 750-2400

We hereby declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States

Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor: **William R. Wheat**

Inventor's signature: William R. Wheat Date: Apr. 3, '98

Residence (City, County, State) Houston, Harris County, Texas

Citizenship: USA

Post Office Address: 16403 Laurelfeld
Houston, TX 77059

Full name of second inventor: **Aiko Hanyu**

Inventor's signature: Aiko Hanyu Date: 4/3/98

Residence (City, County, State) Houston, Harris County, Texas

Citizenship: Japan

Post Office Address: 900 Henderson Avenue, #2112
Houston, TX 77058